

STATE OF MISSOURI
DEPARTMENT OF NATURAL RESOURCES

MISSOURI CLEAN WATER COMMISSION



MISSOURI STATE OPERATING PERMIT

In compliance with the Missouri Clean Water Law, (Chapter 644 R.S. Mo. as amended, hereinafter, the Law), and the Federal Water Pollution Control Act (Public Law 92-500, 92nd Congress) as amended,

Permit No. MO-0110833

Owner: BFI, Backridge Sanitary Landfill
Address: Route B, Box 430, LaGrange, MO 63448

Continuing Authority: Same as above
Address: Same as above

Facility Name: BFI, Backridge Sanitary Landfill
Address: Route B, Box 430, LaGrange, MO 63448

Legal Description: See page 2

Receiving Stream: Unnamed Tributary to Mississippi River (U)
First Classified Stream and ID: Mississippi River (P)(00001)
USGS Basin & Sub-watershed No.: (07110001-230001)

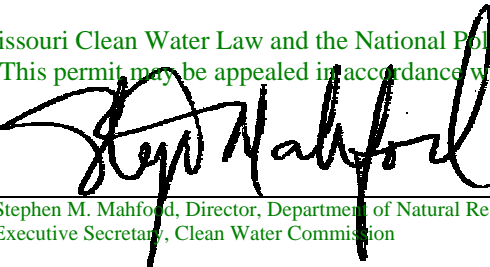
is authorized to discharge from the facility described herein, in accordance with the effluent limitations and monitoring requirements as set forth herein:

FACILITY DESCRIPTION

See page 2

This permit authorizes only wastewater discharges under the Missouri Clean Water Law and the National Pollutant Discharge Elimination System; it does not apply to other regulated areas. This permit may be appealed in accordance with Section 644.051.6 of the Law.

July 26, 2002
Effective Date


Stephen M. Mahford, Director, Department of Natural Resources
Executive Secretary, Clean Water Commission

July 25, 2007
Expiration Date
MO 780-0041 (10-93)

Jim Hull, Director of Staff, Clean Water Commission

FACILITY DESCRIPTION (continued)

Outfall #001 - Active Sanitary Landfill - SIC #4953

Stormwater runoff/sedimentation basin.

Design flow is 1.74 MGD (10-year, 24-hour rainfall = 4.9 inches, 13.1 acres).

Actual flow is dependent on rainfall.

Legal Description: SW $\frac{1}{4}$, NW $\frac{1}{4}$, Sec. 12, T60N, R6W, Lewis County

Outfall #002 - Active Sanitary Landfill - SIC #4953

Stormwater runoff/sedimentation basin.

Design flow is 2.96 MGD (10-year, 24-hour rainfall = 4.9 inches, 20.8 acres).

Actual flow is dependent on rainfall.

Legal Description: SE $\frac{1}{4}$, NE $\frac{1}{4}$, Sec. 11, T60N, R6W, Lewis County

Outfall #003 - Active Sanitary Landfill - SIC #4953

Stormwater runoff.

Design flow is 3.79 MGD (10-year, 24-hour rainfall = 4.9 inches, 28.5 acres).

Actual flow is dependent on rainfall.

Legal Description: NE $\frac{1}{4}$, NE $\frac{1}{4}$, Sec. 11, T60N, R6W, Lewis County

					PAGE NUMBER 3 of 6	
A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS					PERMIT NUMBER MO-0110833	
The permittee is authorized to discharge from outfall(s) with serial number(s) as specified in the application for this permit. The final effluent limitations shall become effective upon issuance and remain in effect until expiration of the permit. Such discharges shall be controlled, limited and monitored by the permittee as specified below:						
OUTFALL NUMBER AND EFFLUENT PARAMETER(S)	UNITS	FINAL EFFLUENT LIMITATIONS			MONITORING REQUIREMENTS	
		DAILY MAXIMUM	WEEKLY AVERAGE	MONTHLY AVERAGE	MEASUREMENT FREQUENCY	SAMPLE TYPE
<u>Outfalls #001, #002 & #003</u>						
Flow	MGD	*		*	once/quarter**	instantaneous estimate
Rainfall	inches	*		*	daily	***
BETX	mg/L	0.75		0.75	once/quarter**	grab
Biochemical Oxygen Demand ₅	mg/L	60		45	once/quarter**	grab
Chemical Oxygen Demand	mg/L	120		90	once/quarter**	grab
Total Suspended Solids	mg/L	80		60	once/quarter**	grab
Settleable Solids	mL/L/hr	1.5		1.0	once/quarter**	grab
Total Dissolved Solids	mg/L	*		*	once/quarter**	grab
Conductivity (Specific Conductance)	micromhos /cm 25°C	*		*	once/quarter**	grab
Chloride Plus Sulfates	mg/L	1000		*	once/quarter**	grab
Iron, Total Recoverable	mg/L	*		*	once/quarter**	grab
pH - Units	SU	****		****	once/quarter**	grab
MONITORING REPORTS SHALL BE SUBMITTED <u>QUARTERLY</u> ; THE FIRST REPORT IS DUE <u>October 28, 2002</u> .						
Calcium	mg/L	*		*	once/year*****	grab
Fluoride	µg/L	*		*	once/year*****	grab
Total Hardness	µg/L	*		*	once/year*****	grab
Barium, Total Recoverable	µg/L	*		*	once/year*****	grab
Boron, Total Recoverable	µg/L	*		*	once/year*****	grab
Cadmium, Total Recoverable	µg/L	*		*	once/year*****	grab
Chromium, Total Recoverable	µg/L	*		*	once/year*****	grab
Cobalt, Total Recoverable	µg/L	*		*	once/year*****	grab
Copper, Total Recoverable	µg/L	*		*	once/year*****	grab
Sodium, Total Recoverable	mg/L	*		*	once/year*****	grab
Ammonia as N (Note 1)	mg/L	*****		*****	once/year*****	grab
Temperature	°C	*		*	once/year*****	grab
Nitrate & Nitrite as N	mg/L	*		*	once/year*****	grab
MONITORING REPORTS SHALL BE SUBMITTED <u>ANNUALLY</u> ; THE FIRST REPORT IS DUE <u>October 28, 2003</u> . THERE SHALL BE NO DISCHARGE OF FLOATING SOLIDS OR VISIBLE FOAM IN OTHER THAN TRACE AMOUNTS.						
B. STANDARD CONDITIONS						
IN ADDITION TO SPECIFIED CONDITIONS STATED HEREIN, THIS PERMIT IS SUBJECT TO THE ATTACHED <u>Part I</u> STANDARD CONDITIONS DATED <u>October 1, 1980</u> , AND HEREBY INCORPORATED AS THOUGH FULLY SET FORTH HEREIN.						

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS					PAGE NUMBER 4 of 6	
					PERMIT NUMBER MO-0110833	
The permittee is authorized to discharge from outfall(s) with serial number(s) as specified in the application for this permit. The final effluent limitations shall become effective upon issuance and remain in effect until expiration of the permit. Such discharges shall be controlled, limited and monitored by the permittee as specified below:						
OUTFALL NUMBER AND EFFLUENT PARAMETER(S)	UNITS	FINAL EFFLUENT LIMITATIONS			MONITORING REQUIREMENTS	
		DAILY MAXIMUM	WEEKLY AVERAGE	MONTHLY AVERAGE	MEASUREMENT FREQUENCY	SAMPLE TYPE
<u>Outfalls #001, #002 & #003</u>						
Phosphorus, Total Recoverable	mg/L	*		*	once/year*****	grab
Mercury, Total Recoverable	µg/L	*		*	once/year*****	grab
Arsenic, Total Recoverable	µg/L	*		*	once/year*****	grab
Lead, Total Recoverable	µg/L	*		*	once/year*****	grab
Selenium, Total Recoverable	µg/L	*		*	once/year*****	grab
Silver, Total Recoverable	µg/L	*		*	once/year*****	grab
Manganese, Total Recoverable	µg/L	*		*	once/year*****	grab
Magnesium, Total Recoverable	µg/L	*		*	once/year*****	grab
Zinc, Total Recoverable	µg/L	*		*	once/year*****	grab
Antimony, Total Recoverable	µg/L	*		*	once/year*****	grab
Beryllium, Total Recoverable	µg/L	*		*	once/year*****	grab
Nickel, Total Recoverable	µg/L	*		*	once/year*****	grab
Sulfate	mg/L	*		*	once/year*****	grab
Thallium, Total Recoverable	µg/L	*		*	once/year*****	grab
Total Organic Carbon	mg/L	*		*	once/year*****	grab
Vanadium, Total Recoverable	µg/L	*		*	once/year*****	grab
Oil & Grease	mg/L	15		10	once/year*****	grab
MONITORING REPORTS SHALL BE SUBMITTED <u>ANNUALLY</u> ; THE FIRST REPORT IS DUE <u>October 28, 2003</u> . THERE SHALL BE NO DISCHARGE OF FLOATING SOLIDS OR VISIBLE FOAM IN OTHER THAN TRACE AMOUNTS.						
B. STANDARD CONDITIONS						
IN ADDITION TO SPECIFIED CONDITIONS STATED HEREIN, THIS PERMIT IS SUBJECT TO THE ATTACHED <u>Part I</u> STANDARD CONDITIONS DATED <u>October 1, 1980</u> , AND HEREBY INCORPORATED AS THOUGH FULLY SET FORTH HEREIN.						

MO 780-0010 (8/91)

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS (continued)

- * Monitoring requirement only.
- ** Sample once per quarter in the months of March, May, September & November.
- *** Grab samples shall be collected during a rainfall event, when there is runoff from the landfill site. The sample shall be collected no later than one hour after runoff begins.
- **** pH is measured in pH units and is not to be averaged. The pH is limited to the range of 6.0-9.0 pH units.
- ***** The discharge shall not exceed the appropriate values in Table B of 10 CSR 20-7.031.
- ***** Samples to be taken in the month of September.

Note 1 - When collecting samples for ammonia, pH and temperature must also be measured and included with the report to determine if an exceedence to the water quality standards has occurred for ammonia.

C. SPECIAL CONDITIONS

1. This permit may be reopened and modified, or alternatively revoked and reissued, to:
 - (a) Comply with any applicable effluent standard or limitation issued or approved under Sections 301(b)(2)(C) and (D), 304(b)(2), and 307(a) (2) of the Clean Water Act, if the effluent standard or limitation so issued or approved:
 - (1) contains different conditions or is otherwise more stringent than any effluent limitation in the permit; or
 - (2) controls any pollutant not limited in the permit.
 - (b) Incorporate new or modified effluent limitations or other conditions, if the result of a waste load allocation study, toxicity test or other information indicates changes are necessary to assure compliance with Missouri's Water Quality Standards.
 - (c) Incorporate new or modified effluent limitations or other conditions if, as the result of a watershed analysis, a Total Maximum Daily Load (TMDL) limitation is developed for the receiving waters which are currently included in Missouri's list of waters of the state not fully achieving the state's water quality standards, also called the 303(d) list.

The permit as modified or reissued under this paragraph shall also contain any other requirements of the Clean Water Act then applicable.

2. All outfalls must be clearly marked in the field.

3. Changes in Discharges of Toxic Substances

The permittee shall notify the Director as soon as it knows or has reason to believe:

- (a) That any activity has occurred or will occur which would result in the discharge of any toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following "notification levels:"
 - (1) One hundred micrograms per liter (100 µg/L);
 - (2) Two hundred micrograms per liter (200 µg/L) for acrolein and acrylonitrile; five hundred micrograms per liter (500 µg/L) for 2,5 dinitrophenol and for 2-methyl-4, 6-dinitrophenol; and one milligram per liter (1 mg/L) for antimony;
 - (3) Five (5) times the maximum concentration value reported for the pollutant in the permit application;
 - (4) The level established in Part A of the permit by the Director.
 - (b) That they have begun or expect to begin to use or manufacture as an intermediate or final product or byproduct any toxic pollutant, which was not reported in the permit application.
4. Report as no-discharge when a discharge does not occur during the report period.
 5. Sanitary and Demolition Landfill
 - (a) All design and operating specifications and all Solid Waste Management Program approval conditions pertaining to water quality are hereby made part of this permit and shall apply throughout the life of this permit without regard to other conditions, permits, occurrences, etc.
 - (b) This permit does not allow the discharge of stormwater that has contacted the open face of the landfill. This permit does not allow the discharge of untreated leachate. All leachate shall be handled in accordance with the Solid Waste Disposal Area Operating Permit, Report of Approval of Plans and Specifications (with conditions).

C. SPECIAL CONDITIONS

5. Sanitary and Demolition Landfill (continued)

- (c) All discharges shall comply with the Missouri Water Quality Standards, 10 CSR 20-7.301, Section (3)(C), which states "Waters shall be free from substances in sufficient amounts to cause unsightly color or turbidity..." and Section (4)(G), which states "Waters contaminants shall not cause or contribute to turbidity or color that will cause substantial visible contrast with the natural appearance of the stream..."
- (d) All activities performed to control erosion on the landfill site (seeding, mulching, terracing, etc.) shall be described and submitted along with the second quarter and fourth quarter Discharge Monitoring Reports. If no erosion control measures are undertaken, indicate so on the reports.

6. General Criteria. The following water quality criteria shall be applicable to all waters of the state at all times including mixing zones. No water contaminant, by itself or in combination with other substances, shall prevent the waters of the state from meeting the following conditions:

- (a) Waters shall be free from substances in sufficient amounts to cause the formation of putrescent, unsightly or harmful bottom deposits or prevent full maintenance of beneficial uses;
- (b) Waters shall be free from oil, scum and floating debris in sufficient amounts to be unsightly or prevent full maintenance of beneficial uses;
- (c) Waters shall be free from substances in sufficient amounts to cause unsightly color or turbidity, offensive odor or prevent full maintenance of beneficial uses;
- (d) Waters shall be free from substances or conditions in sufficient amounts to result in toxicity to human, animal or aquatic life;
- (e) There shall be no significant human health hazard from incidental contact with the water;
- (f) There shall be no acute toxicity to livestock or wildlife watering;
- (g) Waters shall be free from physical, chemical or hydrologic changes that would impair the natural biological community;
- (h) Waters shall be free from used tires, car bodies, appliances, demolition debris, used vehicles or equipment and solid waste as defined in Missouri's Solid Waste Law, section 260.200, RSMo, except as the use of such materials is specifically permitted pursuant to section 260.200-260.247.

7. The leachate collection system, irrigation equipment, and land application rates for the phase III leachate management system must be approved by the Solid Waste Management Program prior to land application taking place. Leachate shall not be land applied to areas that are not underlain by a leachate collection system.